FGT Series Fiberglass Threaded Penetration Fittings With Corrugated Duct

TECHNICAL DATA SHEET

Fiberglass penetrations for use with corrugated duct are used on single wall tank and UDC sumps. Fittings consist of an inner body and outer cap that is manufactured from a proprietary blend of fiberglass material. This double sided fitting provides a removable seal on the inside of the sump to the secondary piping allowing for future pipe removal or repair.
Both the interior fitting and exterior fitting are bonded to the sump wall.

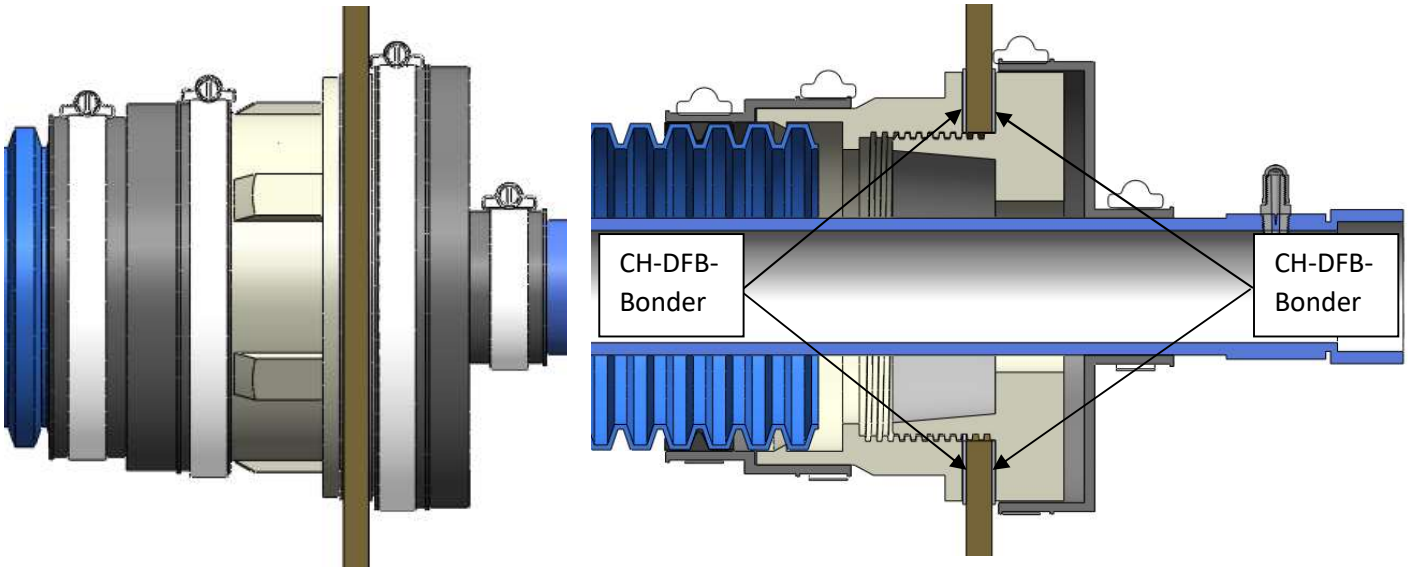

Product Approvals	PRODUCTS USED ON THIS PROJECT		
	Yes	No	
	☐	☐	4" OPW APX40 — PF-FGT-4.5-APX-40-XX
	☐	☐	4" OF UGF-CP-4 — PF-FGT-4.5-UGF-CP-4-XX
	☐	☐	4" APT Duct-400 — PF-FGT-4.5-Duct-400-XX

MADE IN USA

N.D. ERYOU PhD, PE Consulting Engineer
THIRD-PARTY UL 2447

FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION
EQ-742 EQ-801 EQ-836